


10.18: Ramp Setting Chart

For any particular ramp setting, a combination of HEIGHT at the top edge and LENGTH out of the water enclosed within the highlighted areas is allowable. A combination that lies on the middle line is the most desirable unless conditions indicate that another in tolerance setting would be more appropriate. Ramp setting must be within the indicated tolerances in the graph.

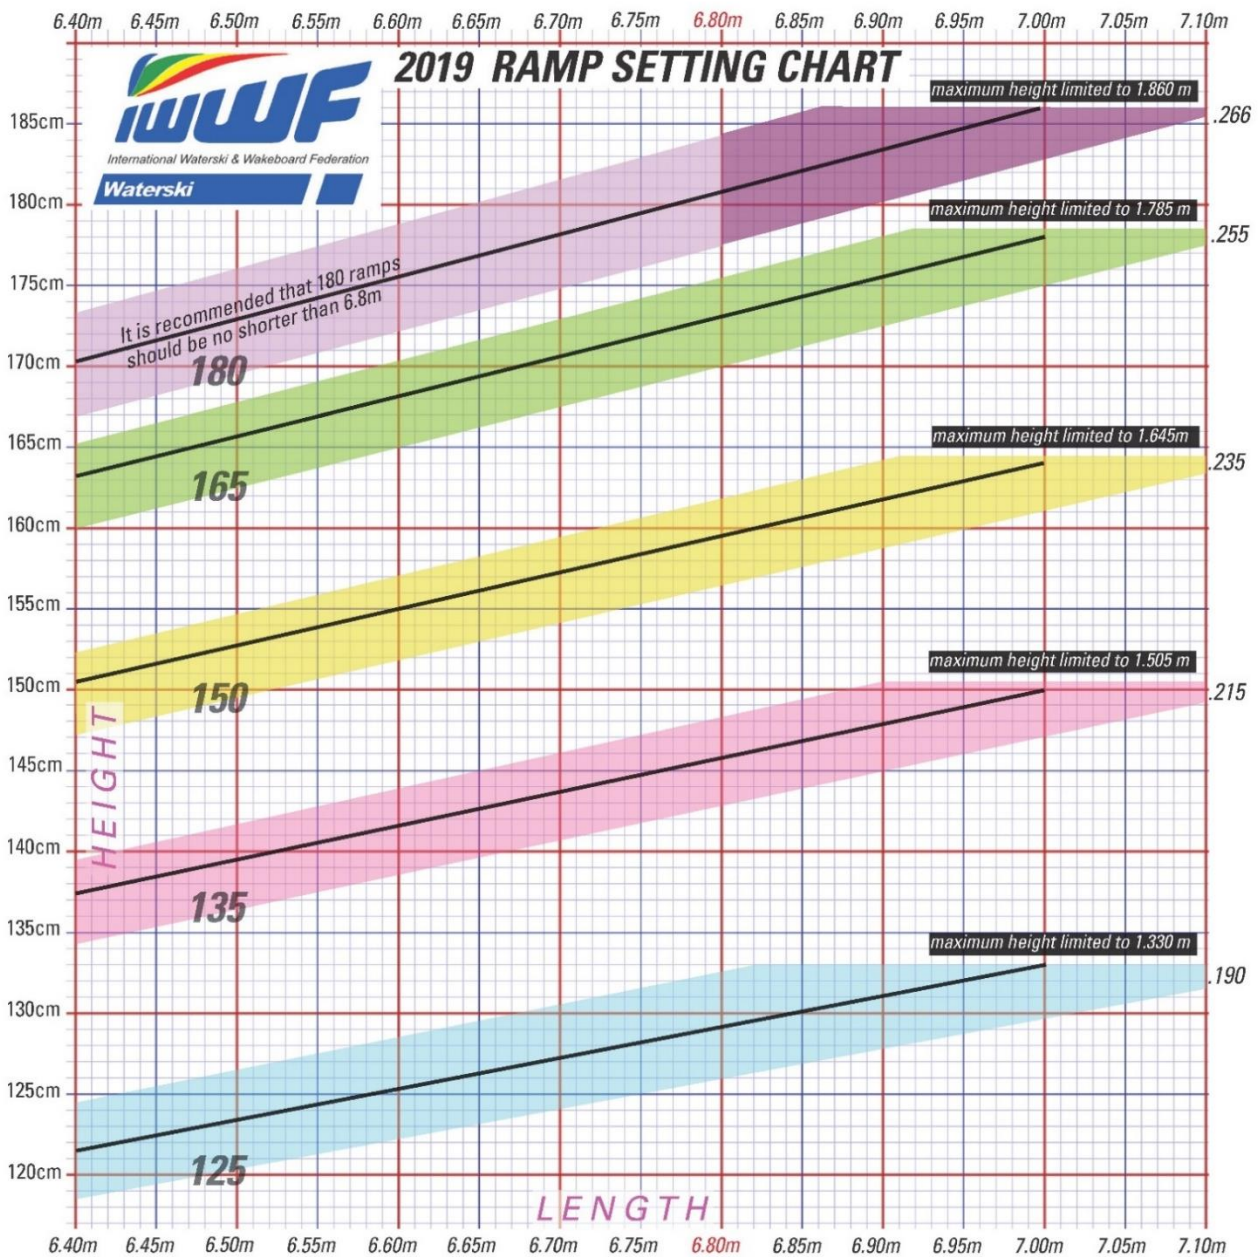

Ramp amendment 2019. Effective from March 2019		Ratio	6.40	6.80	length	7.10
The 1.85 angle ratio is now 0.266 +0.005 / -0.005. Maximum height is capped at 1.860	180	0.005	0.271	1.734	1.843	Capped to 1.860
			0.266	1.702	1.809	
		-0.005	0.261	1.670	1.775	
The 1.65 angle ratio is now 0.255 +0.003 / -0.005. Maximum height is capped at 1.785	165	0.003	0.258	1.651	1.754	Capped to 1.785
			0.255	1.632	1.734	
		-0.005	0.250	1.600	1.700	
The 1.50 angle ratio is now 0.235 +0.003 / -0.005. Maximum height is capped at 1.645	150	0.003	0.238	1.523	1.618	Capped to 1.645
			0.235	1.504	1.598	
		-0.005	0.230	1.472	1.564	
The 1.35 angle ratio is now 0.215 +0.003 / -0.005. Maximum height is capped at 1.505	135	0.003	0.218	1.395	1.482	Capped to 1.505
			0.215	1.376	1.462	
		-0.005	0.210	1.344	1.428	
The 1.25 angle ratio is now 0.190 +0.005 / -0.005. Maximum height is capped at 1.330	125	0.005	0.195	1.248	1.326	Capped to 1.330
			0.190	1.216	1.292	
		-0.005	0.185	1.184	1.258	

Length under water 50cm minimum.