




2023 RAMP SETTING

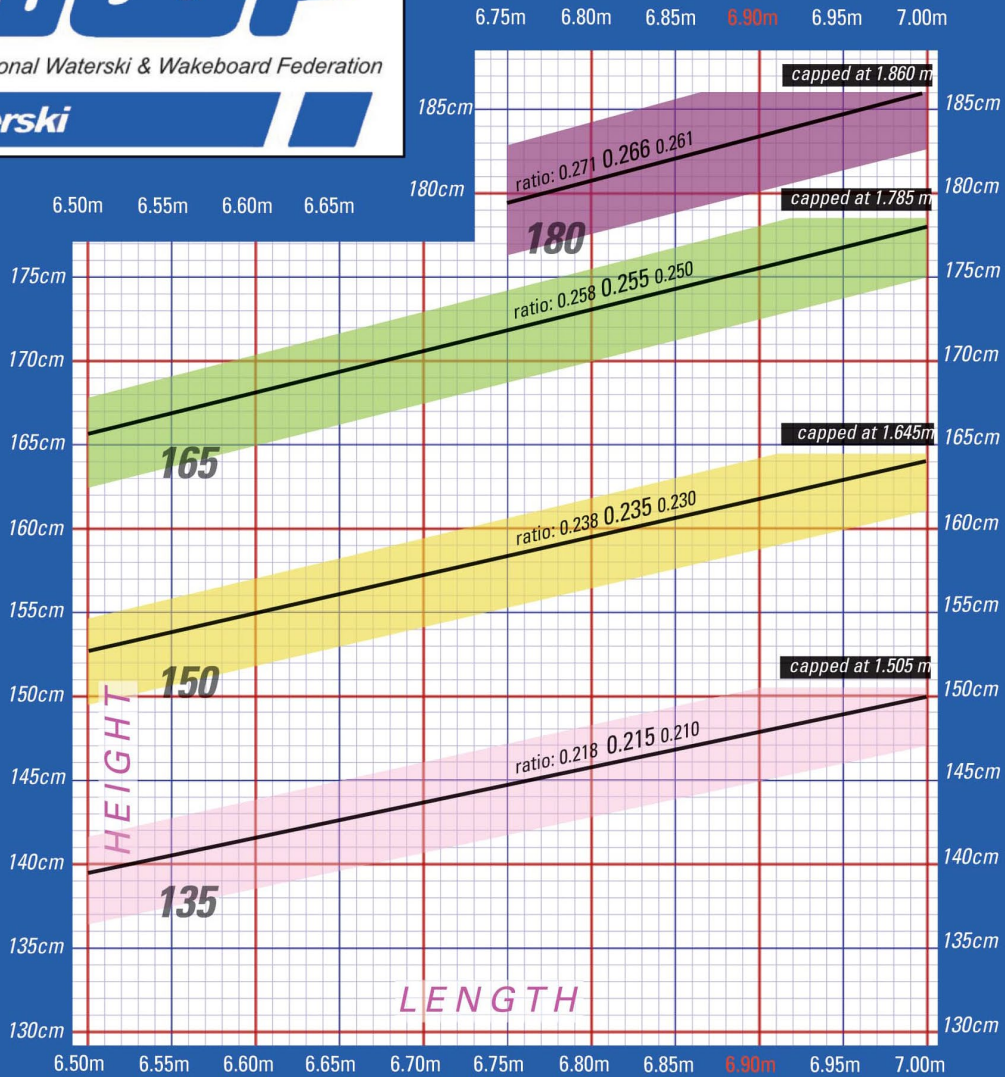

Ramp Setting details 2023		Ratio		6.75m	6.90m	7.00m
The 1.85 angle ratio is 0.266 +0.005 / -0.005. Maximum height is capped at 1.860	180	0.005	0.271	1.829	1.860	1.860
			0.266	1.796	1.835	1.860
		-0.005	0.261	1.762	1.801	1.827
		Ratio		6.50m	6.90m	7.00m
The 1.65 angle ratio is 0.255 +0.003 / -0.005. Maximum height is capped at 1.785	165	0.003	0.258	1.677	1.785	1.785
			0.255	1.658	1.760	1.785
		-0.005	0.250	1.625	1.725	1.750
The 1.50 angle ratio is 0.235 +0.003 / -0.005. Maximum height is capped at 1.645	150	0.003	0.238	1.547	1.642	1.645
			0.235	1.528	1.622	1.645
		-0.005	0.230	1.495	1.587	1.610
The 1.35 angle ratio is 0.215 +0.003 / -0.005. Maximum height is capped at 1.505	135	0.003	0.218	1.417	1.504	1.505
			0.215	1.398	1.484	1.505
		-0.005	0.210	1.365	1.449	1.470

Ramps should have clear marks at 6.5m and 7.0m. Ramps with marks at 6.4m and 6.8m are still permitted. Recommended length 6.90m. The length underwater must be a minimum of 50cm